

LC

Hanging water heaters only heat




LC 28



LC 40

Model	Heating Output kW	Air Flow m ³ /h	Code	€
LC 28 aerotermino solo caldo	28,1	2250	30401020	1.094,00
LC 40 aerotermino solo caldo	42,4	4300	30401030	1.988,00


Accessories heaters LC 28



Remote control with an
ambiance thermostat and
summer-off-winter selector

75100007


130,00



Kit 3-ways valve including
ON/OFF actuator
pipes and couplings

36205404


180,00



ceiling mount kit
includes chains and the eyebolts

30150092


60,00



thermostat of mechanical
consent

30402004

36,00




single-beam
support bracket

30240090

104,00

Dimensions heaters LC 28

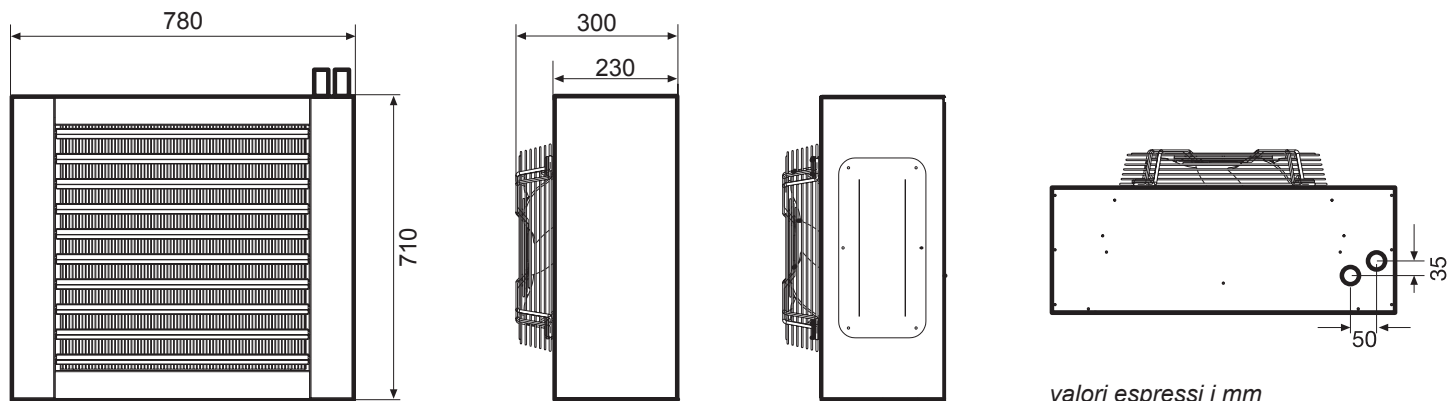

Technical data table LC 28

DESCRIPTION	U.M.	LC 28
Thermal power (1)	kW	28,1
Thermal power (2)	kW	21,4
Air flow	m ³ /h	2250
Water flow rate	l/h	2420
Water pressure drop	kPa	12,6
Fans number	n.	1
Number speed	n.	1
Fan diameter	mm	350
Number of turns to the minute	n.	1300
Launching	m	16
Sound pressure	dB(A)	52
Hydro connections	"	1
Power supply		230V/1/50Hz
Absorption	W	90
Water inlet temperature max	°C	80
Air inlet temperature max	°C	50
Max pressure	kPa	800
Unit IP code		IP 24
Net weight	kg	38

(1) Heating output: Room air temperature 20 °C
Water temperature inlet 70 °C, ΔT 10 °C

(2) Heating output: Room air temperature 20 °C
Water temperature inlet 60 °C, ΔT 10 °C