



COMMERCIAL LINE CONSOLE DC INVERTER

Split system air conditioners



SCOP =
A+++

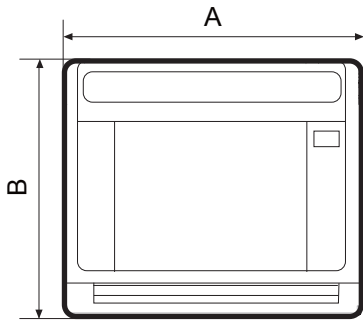

	A	B	C	
	mm	mm	mm	kg
CONSOLE 12 INVERTER U.I.	794	621	206	14,9

MODEL		REFRIGERATION POWER	POTENZA TERMICA	€
		kW	kW	
CONSOLE 12 DC INVERTER INDOOR UNIT	cod. 63000014	3,52	3,81	924,00
CONSOLE OUTDOOR UNIT 12 INVERTER	cod. 63000016			1.092,00

TECHNICAL DATA	UM	CONSOLE 12
Refrigeration power	kW	3,52
Absorbed power	kW	1,0
Current consumption	A	4,52
S.E.E.R.		6,1 A++
Thermal power	kW	3,81
Absorbed power	kW	0,98
Current consumption	A	4,43
S.C.O.P. Mid-range		4,0 A+
S.C.O.P. Hot band		5,1 A+++
Power Supply		230V/1/50Hz
Air flow	m ³ /h	650/580/490
Sound level I.U.	dB (A)	37/34/27
Length Piping	m	≤ 25
Height difference between Units	m	≤ 10
Gas attacks		3/8"
Attacks Liquid		1/4"

*Value referred to the sum of the external unit + internal unit absorptions (separate power supplies)
Cooling test conditions: int. 27 °C dry bulb / 19.5 °C wet bulb - ext. 35 °C dry bulb / 24 °C wet bulb
Heating test conditions: int. 20 °C dry bulb - ext. 7 °C dry bulb / 6 °C wet bulb