


# COMMERCIAL LINE DC INVERTER CASSETTE

## Split system air conditioners

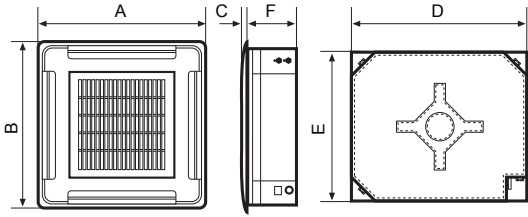

	A	B	C	D	E	F	
	mm	mm	mm	mm	mm	mm	kg
CASSETTE 12 INVERTER	647	647	50	570	570	260	18,4
CASSETTE 20 INVERTER	647	647	50	570	570	260	18,4
CASSETTE 25 INVERTER	950	950	55	830	830	205	30,6
CASSETTE 38 INVERTER	950	950	55	830	830	245	33,2

	A	B	C	D	E	F	
	mm	mm	mm	mm	mm	mm	kg
CASSETTE 38T INVERTER	950	950	55	830	830	245	33,2
CASSETTE 50 INVERTER	950	950	55	830	830	287	35,3
CASSETTE 60 INVERTER	950	950	55	830	830	287	35,3










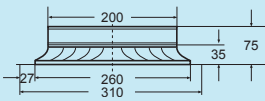

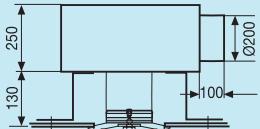
MODEL		COOLING POWER kW	THERMAL POWER kW	€
CASSETTE 12 DC INVERTER U.I.	cod. 63000015	3,51 (0,85÷4,11)	3,80 (0,47÷4,31)	1.065,00
OUTDOOR UNIT 12 DC INVERTER U.E.	cod. 63000016			1.092,00
CASSETTE 20 DC INVERTER U.I.	cod. 63000017	5,27 (2,90÷5,59)	5,23 (2,37÷6,10)	1.194,00
OUTDOOR UNIT 20 DC INVERTER U.E.	cod. 63000018			1.520,00
CASSETTE 25 DC INVERTER U.I.	cod. 63000019	6,15 (3,30÷7,91)	7,62 (2,81÷8,94)	1.374,00
OUTDOOR UNIT 25 DC INVERTER U.E.	cod. 63000020			1.930,00
CASSETTE 38M FASE DC INVERTER U.I.	cod. 63000021	9,94 (2,70÷11,43)	11,14 (2,78÷12,30)	1.568,00
OUTDOOR UNIT 38M FASE DC INVERTER U.E.	cod. 63000022			3.249,00
CASSETTE 38T FASE DC INVERTER U.I.	cod. 63000021	10,01 (2,70÷11,43)	11,14 (2,78÷12,30)	1.568,00
OUTDOOR UNIT 38T FASE DC INVERTER U.E.	cod. 63000023			3.302,00
CASSETTE 50 DC INVERTER U.I.	cod. 63000024	12,92 (3,52÷15,83)	15,43 (4,10÷17,29)	1.714,00
OUTDOOR UNIT 50 DC INVERTER U.E.	cod. 63000025			3.876,00
CASSETTE 60 DC INVERTER U.I.	cod. 63000026	15,24 (4,10÷16,71)	18,17 (4,40÷19,93)	1.905,00
OUTDOOR UNIT 60 DC INVERTER U.E.	cod. 63000027			4.374,00

TECHNICAL DATA	UM	CASSETTE 12	CASSETTE 20	CASSETTE 25	CASSETTE 38M	CASSETTE 38T	CASSETTE 50	CASSETTE 60
Cooling power	kW	3,51 (0,85÷4,1)	5,27 (2,90÷5,59)	6,15 (3,30÷7,91)	9,94 (2,70÷11,43)	9,94 (2,70÷11,43)	12,92 (3,52÷15,83)	15,24 (4,10÷16,71)
Absorbed power	kW	1,01 (0,16÷1,43)*	1,63 (0,72÷1,43)*	1,87	2,98	3,04	3,96	5,00
Current consumption	A	4,45 (1,32÷6,31)*	7,2 (3,2÷9,2)*	10,20	17,50	6,5	8,10	8,60
S.E.E.R.		6,6 <b>A++</b>	6,3 <b>A++</b>	6,2 <b>A++</b>	6,7 <b>A++</b>	6,7 <b>A++</b>	6,1 <b>A++</b>	6,3 <b>A++</b>
Thermal power	kW	3,80 (0,47÷4,31)	5,23 (2,37÷6,10)	7,62 (2,81÷8,94)	11,14 (2,78÷12,30)	11,14 (2,78÷12,30)	15,43 (4,10÷17,29)	18,17 (4,40÷19,93)
Absorbed power	kW	1,01 (0,12÷1,37)*	1,54 (0,70÷1,93)*	1,90	3,00	3,00	4,13	5,55
Current consumption	A	4,73 (1,04÷6,07)*	6,8 (3,1÷8,5)*	8,50	13,50	5,0	8,00	9,60
S.C.O.P. Mid-range		4,1 <b>A+</b>	4,0 <b>A+</b>	4,0 <b>A+</b>	4,0 <b>A+</b>	4,0 <b>A+</b>	4,0 <b>A+</b>	4,0 <b>A+</b>
S.C.O.P. Warm-range		5,1 <b>A+++</b>	4,8 <b>A+++</b>	5,1 <b>A+++</b>	5,1 <b>A+++</b>	5,1 <b>A+++</b>	5,0 <b>A++</b>	5,1 <b>A+++</b>
Power supply		230V/1/50Hz	230V/1/50Hz	230V/1/50Hz	230V/1/50Hz	380V/3+N/50Hz	380V/3+N/50Hz	380V/3+N/50Hz
Air flow	m <sup>3</sup> /h	569/485/389	680/584/479	1300/1140/1000	1700/1550/1380	1700/1550/1380	1970/1780/1580	2000/1850/1650
Sound level I.U.	dB (A)	42/37,5/34,5	45,4/44/39	45,5/42,5/39,5/27	50/47,5/44,5/39	50/47,5/44,5/39	51/48,5/46,5/37,5	53/50,5/48/40
Length Piping	m	≤ 25	≤ 30	≤ 50	≤ 75	≤ 75	≤ 75	≤ 75
Dislevel units	m	≤ 10	≤ 20	≤ 25	≤ 30	≤ 30	≤ 30	≤ 30
Gas connections		3/8"	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"
Liquid connections		1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"

Cooling test conditions: int. 27 °C d.b. / 19.5 °C wb. - Ext. 35 °C d.b. / 24 °C wb.  
 Heating test conditions: int. 20 °C db. - Ext. 7 °C d.b. / 6 °C wb.

# COMMERCIAL LINE - DUCTABLE ACCESSORIES DC INVERTER

## Split system air conditioners

		€
	Multifunction wired remote control with follow me function, internal receiver and addressing	cod. 63000071 168,00
	Wi-Fi control via smartphone or pad for R32 commercial series indoor units. App suitable for Android and iOS systems with all basic functions. Senior function, weekly timer, personalized sleep curve and self-control.	cod. 63000012 164,00
	TWIN system kit, conversion from commercial range into dual split air conditioner	cod. 63000072 194,00
	FLEX PIPE IN INSULATED PVC for ducts of 10 m - Ø 200	cod. 37900001 208,00
	BRAGA to Y	cod. 65500020 50,00
	DELIVERY PORT 40x20 cm with adjustable blades complete with damper	cod. 37900070 98,00
	CONNECTION PLENUM Ø 200 40x20 cm between flex tube and delivery nozzle	cod. 37900019 146,00
	ANCHOR BRACKETS FOR OUTDOOR UNITS for mod. 9 - 12 complete with anti-vibration kit for mod. 18 - 20 - 25 - 38 - 50 - 60 complete with anti-vibration kit	cod. 37081060 50,00 cod. 37081061 90,00
	CIRCULAR DIFFUSERS Ø 200 with millimetrically adjustable cones and butterfly calibration damper	 cod. 37900027 122,00
	PLENUM CONNECTION Ø 200 between flexible tube and circular diffuser with adjustable cones	 cod. 379000031 210,00