

TERMODINAMICO

Thermodynamic heat pump water heater with sanitary storage



Technical and construction features

THERMODINAMICO is an innovative system for the production of domestic hot water based on the classic operation of the heat pump connected to a thermodynamic solar panel capable of capturing any type of solar and environmental energy (Carnot's principle):

- Energy from diffuse and direct solar radiation
 - Convection energy of air and wind
 - Conduction energy of air, rain and snow
- This product is able to improve both the energy performance of the traditional heat pump and the classic solar thermal collector. THERMODINAMICO was created to work all year round in any weather condition and at any time of the day, both day and night. The thermodynamic panel is made of anti-corrosion anodized aluminum and can be installed in any position both horizontal and vertical on the roof or hung on a wall.

This particular technology allows to capture the energy on both sides of the panel thanks to the ecological gas R134A that circulates freely inside it.

However, to make the most of solar radiation, the ideal exposure remains towards the south with an inclination between 30 ° and 90 ° considering that the more direct the sun is irradiated, the more its yield will increase.

The following configurations are available:

- 1 Standard THERMODINAMICO with a solar panel thermodynamic 1800 x 800 mm
- 2 THERMODINAMICO S with a solar panel 1800 x 800 mm thermodynamic and auxiliary exchanger for use in combination with a wood or pellet or methane boiler



RENEWABLE ENERGY



OPERATION ALL YEAR ROUND



ECOLOGIC GAS



PHOTOVOLTAIC COMBINATION



ENERGY SAVING



DHW



SIMPLE INTEGRATED PROGRAMMING



EASY INSTALLATION

Model	Code	€
TERMODINAMICO	37020100	3.140,00
TERMODINAMICO S	37020200	3.380,00

Dimensions and overall dimensions of the thermodynamic panel




L	mm	800
H	mm	2000
P	mm	40
A	Ø	3/8" SAE
B	Ø	1/4" SAE
Weight	Kg	7,3

TERMODINAMICO

Thermodynamic heat pump water heater with sanitary storage

Dimensions TERMODINAMICO

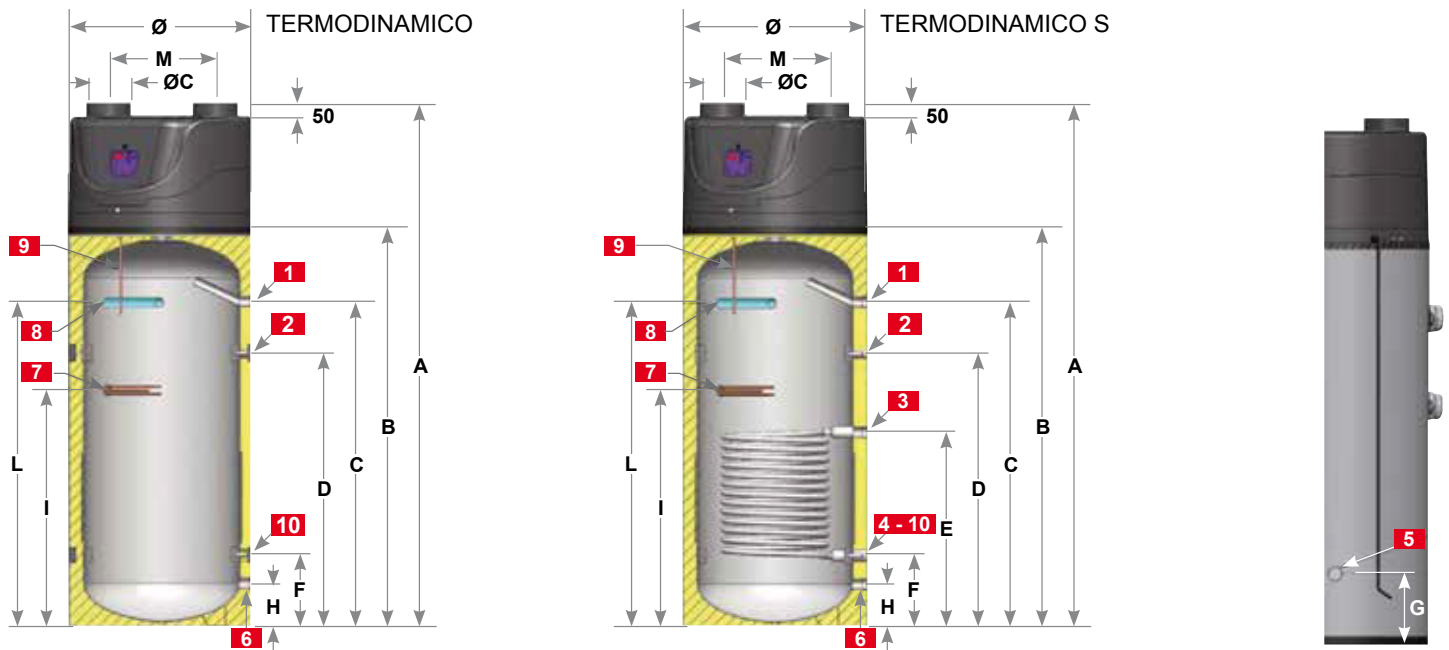

MODEL	U.M.	TERMODINAMICO	TERMODINAMICO S
A	mm	1845	1845
B	mm	1410	1410
C	mm	1150	1150
D	mm	965	965
E	mm	-	690
F	mm	-	255
G	mm	-	365
H	mm	155	155
I	mm	835	835
L	mm	1145	1145
M	mm	425	425
Øc	mm	160	160
Ø	mm	660	660

	DESCRIPTION	DIMENSIONS
1	Hot water	1"
2	Ricirculation	1/2"
3	Alternative energy delivery	1"
4	Alternative energy return	1"
5	Condensate drain	Ø 20 mm
6	Cold water	1"
7	Electrical resistance	1" 1/4
8	Anode	1" 1/4
9	Control probe well	Ø 12 mm
10	Probe well	Ø 12 mm

Technical data table TERMODINAMICO - TERMODINAMICO S

DESCRIPTION	U.M.	TERMODINAMICO	TERMODINAMICO S
Capacity	l	273	268
Auxiliary coil surface	m ²	-	1,5
Solar heat exchanger capacity 80/60 °C	m ³ /h	-	1,6
Domestic hot water production 80/60 °C - 10/45 °C (DIN 4708)	m ³ /h	-	1,6
Maximum operating pressure of the boiler	bar	6	
Max working pressure of the auxiliary coil	bar	10	
Power supply		230V/1/50Hz	
Max water temperature	°C	60	
Electric power resistance	W	1500	
Thermal power (average storage temperature 50 °C)	W	1700 - 2500	
Absorbed power (average storage temperature 50 °C)	W	395 - 550	
Charge gas refrigerant R134a	g	1050	
Sound level	dB(A)	46	
Maximum length of refrigerant pipes	m	12	
Maximum compressor height difference and thermodynamic panel	m	5	
Thermodynamic pannel weight	Kg	7,3	
Technical water tank weight empty	Kg	112	127
Technical water tank weight in operation	Kg	385	395